



TECHNICAL DATA

HAND-GUIDED SINGLE DRUM VIBRATORY ROLLER
BW 55 E



Simple transport

Compact design and foldable guide handle



Precise and save to operate

All function integrated in the steering rod head




No sticking of asphalt

Water spraying system with large water tank (standard)

Shipping dimensions in m3

BW 55 E

0,671

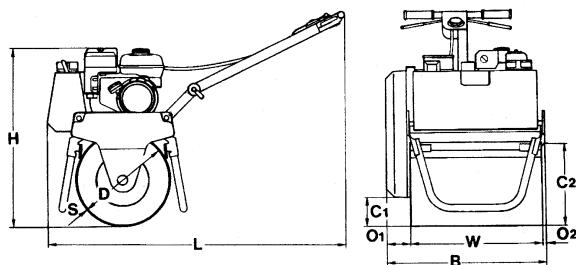

Standard Equipment

- Sprinkler system
- Vibration damped steering rod
- Height adjustable steering rod
- Vibration and throttle regulation on the steering rod
- Scrapers front and rear
- Automatic shutdown at low oil level
- Single point lifting device
- Safety control
- Back-up drive protection
- Support bars front and rear
- 3-2-1 Warranty

Optional Equipment

- Tool kit
- Special painting
- Service Kit
- TOUGH WARRANTY

Dimensions in mm

	B	C1	C2	D	H	L	O1	O2	S	W
BW 55 E	678	125	330	400	900	1100	100	18	5	560

Technical Data

BOMAG

BW 55 E

Weights

Operating weight CECE	kg	150
Basic weight	kg	141
Static linear load CECE	kg/cm	2,7

Dimensions

Working width	mm	560
---------------------	----	-----

Driving Characteristics

Speed (1), forward	km/h	0- 1,1
Speed (1), reverse	km/h	0- 1,1
Speed (2), forward	km/h	0- 1,6
Speed (2), reverse	km/h	0- 1,6
Max. gradeability without/with vibr.	%	25/20

Drive

Engine manufacturer	Honda
Type	GX 120
Emission stage	CARB Phase III
Cooling	air
Number of cylinders	1
Performance SAE J 1349	kW
Speed	min-1
Fuel	gasoline
Starting device	Recoil starter
Drive system	mech.
Fuel comsump. aver. during operation	l/h

Exciter system

Drive system	mech.
Frequency	Hz
Amplitude	mm
Centrifugal force	kN

Sprinkler System

Type of sprinkling	gravity
--------------------------	---------

Capacities

Fuel	l	2,5
Water	l	16,0

Technical modifications reserved. Machines may be shown with options.